

uPVC Color Options

Dark Oak

Walnut

Mahogany

Black Smooth

Rustic Oak

Golden Oak

Anthracite Grey

Smooth Grey

Flemish Gold

Aluminum Color Options

Powder Coating

Anodizing options

White

Light Grey

Dark Grey

Clear

Champagne

Light Bronze

Brown

Blue

Black

Medium Bronze

Auburn

Black

Hardwares



| MANUAL POP-UP HAND |

| TOUCH LOCK |

| CASEMENT ESPAG HANDLE |



| 3D HINGES |

| CD HANDLE |

| WINDOW ROLLER |



Windowfab
Windows & Doors | uPVC
Aluminum



Quality Partners



CHIRU FENESTRATION PVT. LTD

🌐 www.windowfab.in 📧 welcome@windowfab.in ☎ +91 91482 25555

📍 HEAD OFFICE

No. 62/1, 1st Floor, 20th Main, 1st Block,
Near Rajajinagar Metro Station, WOC Road, Bangalore - 560010

📍 BRANCH OFFICE

#12/1, 15th cross, Outer Ring Rd, Sarakki Village, J. P. Nagar,
Near JP Nagar Metro station Bengaluru, Karnataka 560078


OUR SHOWROOM

BANGALORE | CHIKKAMAGALURU | DAVANGERE
HASSAN | HUBLI | DHARWAD | KALABURAGI
MYSORE | SHIVAMOGGA | TUMAKURU
VIJAYAPURA | HOSAPETE | MANGALORE | BELAGAVI

We are social, follow us on your favorite social media



Scan QR
code



Windowfab
Windows & Doors | uPVC
Aluminum



ENCRAFT
ART OF PRECISION




SLIDING SERIES



CASEMENT SERIES



SYSTEM ALUMINUM

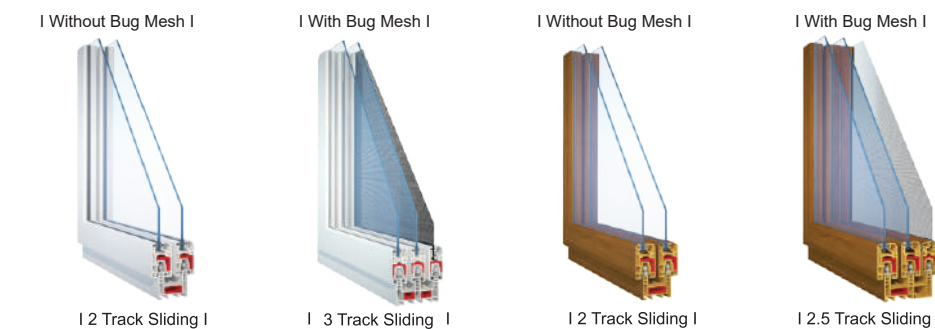



Window style

Door style




Casement Window

Casement Door

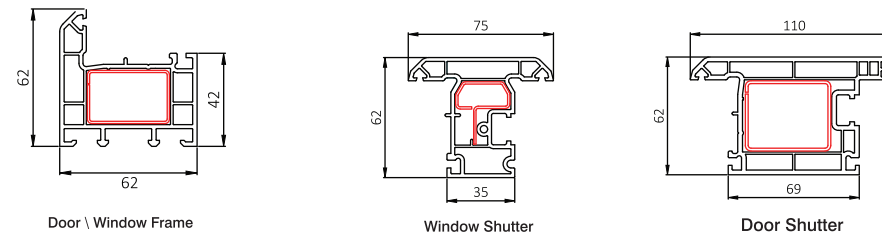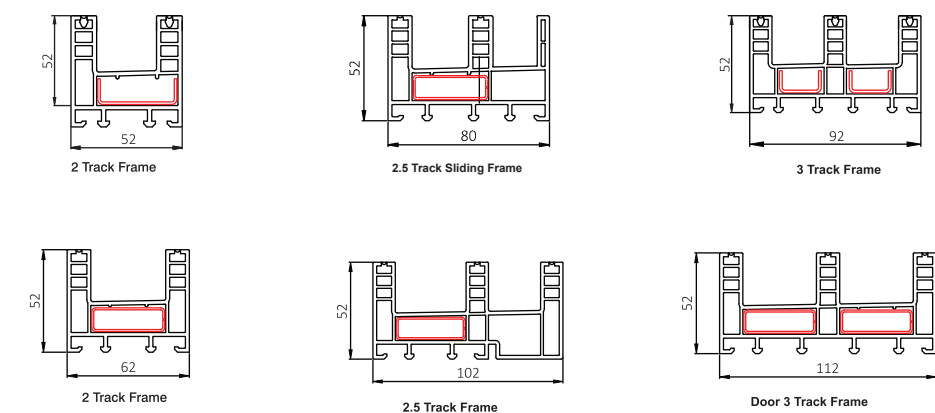

FEATURES:

- Adoption of max 36mm glass for enhanced insulation and sound proof
- Design compatibility with EN casement
- 10 mm sash overlap for enhanced performance
- Internal glazing options from 4 mm single to 36 mm triple
- Latest state of the art, grey concealed glazing and weather seals
- Choice of single or multi-point locking devices, providing basic and high security option
- Secure hardware fitting into steel reinforcements as standard

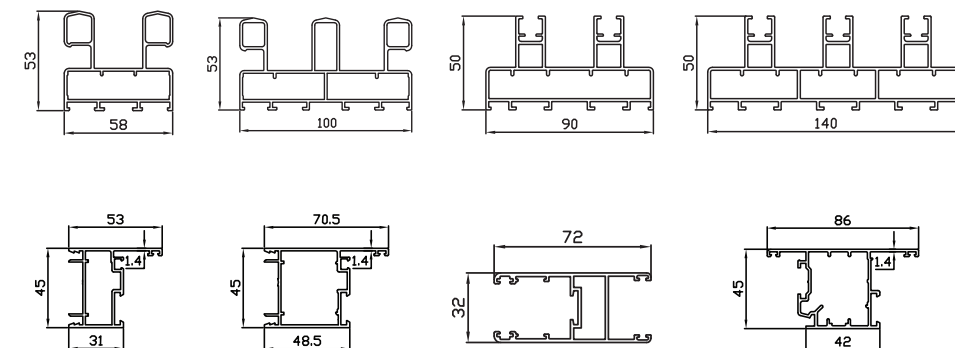

FEATURES:

- Wide range of sections
- Innovative design
- Multi point locking for enhanced security
- Internal Glazing options from 4 mm to 20 mm. Single, Double & Triple Glass
- Versatile, flexible and design oriented

FEATURES:

- Multi-chamber profile design, frame depth from 52 to 112 mm
- Latest state of the art, TPE concealed glazing seals
- Choice of single or multi-point locking devices
- Hardware components fastened into steel or 3 walls
- Durable Aluminum low threshold or aluminum track